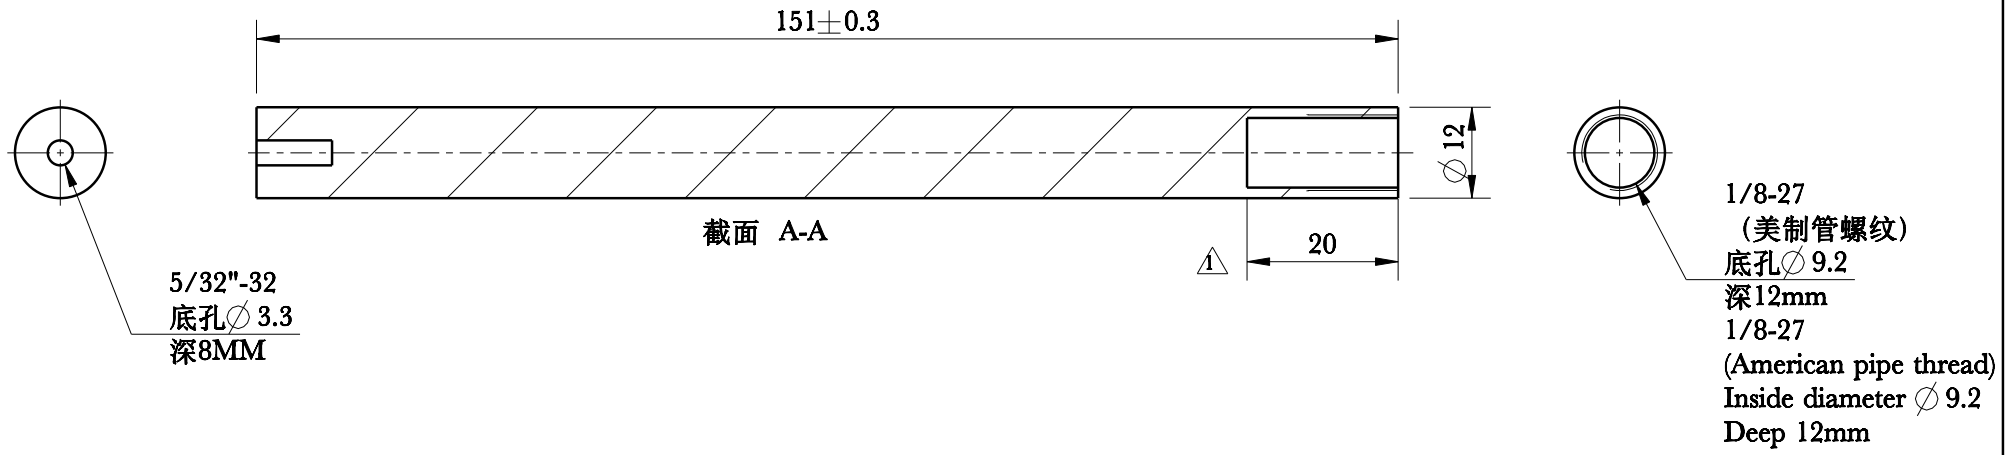

技术要求:
Technical requirements:

1、材质为∅12实心铝棒;
material for ∅12;

2、吊杆两端面需与主体垂直;
The two ends of the boom shall be perpendicular to the main body;

3、HSF控制等级：R级（符合RoHS要求）;
HSF control grade: R (in line with RoHS requirements);

4、外表面为A面，其余面为D面。
The outer surface is side A, and the remaining surface is side D.

铝挤截面积: SECTION AREA:	/	mm^2
零件表面积: SURFACE AREA:	13216	mm^2
零件单重: NET WEIGHT:	89.2	g

序号 No.	变更说明 REVISION NOTE	变更人 CHANGED BY	变更日期 REV DATE
1	孔深变更为20mm The hole depth has been changed to 20 mm	王乾坤	09/01/2026
2			
3			
4			
5			

设 计 DESIGN	王乾坤 08/27/2026	名称 TITLE	FM214618连接杆 Connecting rod
审 核 CHECK	09/01/2026	料 号 PART No.	7MBA121526
标准化 STANDARD	09/01/2026	图 号 DWG No.	FM214618-04 B
批 准 APPROVE	09/01/2026	材 料 MATERIAL	铝杆 AL

WAC GROUP

产品型号 MODEL No.	FM214618
PAGE 1	TOTAL 1 PAGE
比 例 SCALE	1:1
视 角 PERSPECTIVE	

东莞华明灯具有限公司 文控中心 09/01/2026 发 行 WAC LIGHTING (DONGGUAN) CO., LTD.
บริษัท ไทยหมิง ไลท์ติ้ง จำกัด เอกสารภายนอก 09/01/2026 External Document THAI MING LIGHTING CO., LTD.