



坑纹方向
Pit grain direction

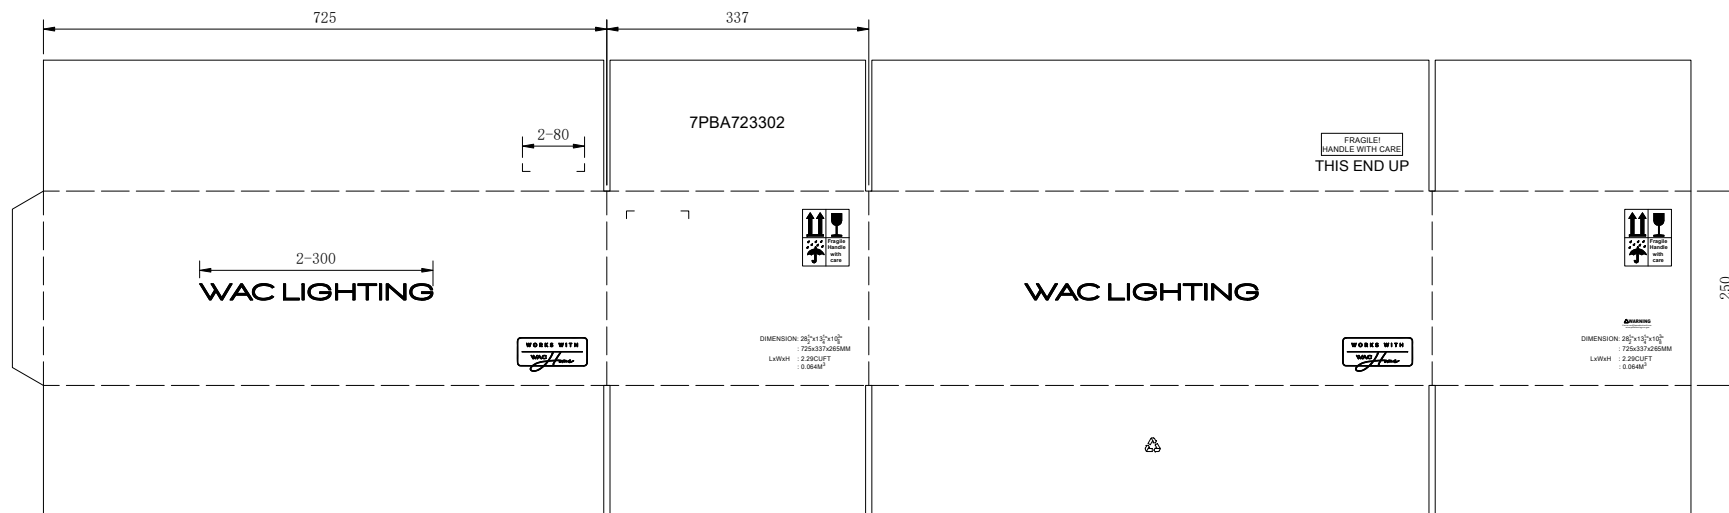

技术说明:
Technical requirements:

1. 装订方式: 钉箱;
Binding method: Nail box
2. 整个版面印刷颜色为黑色;
The printing color of the entire layout is black
3. WAC Logo印刷在外箱的两正唛中间位置, 回收标居中印刷;
WAC logo is printed in the middle of the two positive marks of the outer box, and the recycling mark is printed in the middle;
4. 材质要求: BC坑, 耐破强度: 9 ± 1 (kgf/cm²), 边压强度: $4800\pm 10\%$ (N/m);
Material requirements: BC pit, breaking strength: 9 ± 1 (kgf/cm²), Edgewise crush resistance: $4800\pm 10\%$ (N/m).
5. 直角标距边25mm, 物料号垂直居中印刷;
Right-angle gauge length side 25mm, Part No. vertical center printing.
6. HSF控制等级: R级 (符合RoHS要求).
HSF control level: level R (in accordance with ROHS requirements).

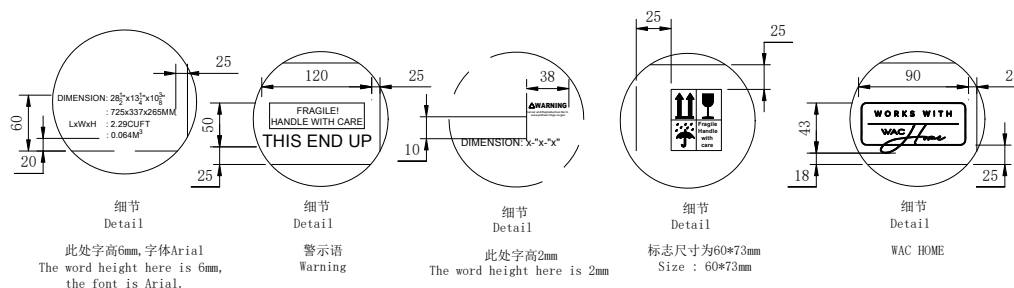

东莞华明灯具有限公司
08/25/2026
发行
WAC LIGHTING (DONGGUAN) CO., LTD.

变更说明
REVISION NTOE

变更日期
DESIGN
08/24/2026
审核
08/24/2026
标准化
08/24/2026
批准
08/24/2026
External Document

陈志刚
08/24/2026
邱溪
08/24/2026
王瑞
08/24/2026
徐俊
08/24/2026

名称 TITLE	WAC外箱 WAC CARTON BOX	料号 PART No.	7PBA723302	产品型号 MODEL No.	PL115725
WAC GROUP		图号 DWG No.	PL115725-34A	第1页 PAGE 1	共1页 TOTAL 1 PAGE
		材料 MATERIAL	A=B	比例 SCALE	
				视角 VIEW	