


坑纹方向
Pit grain direction

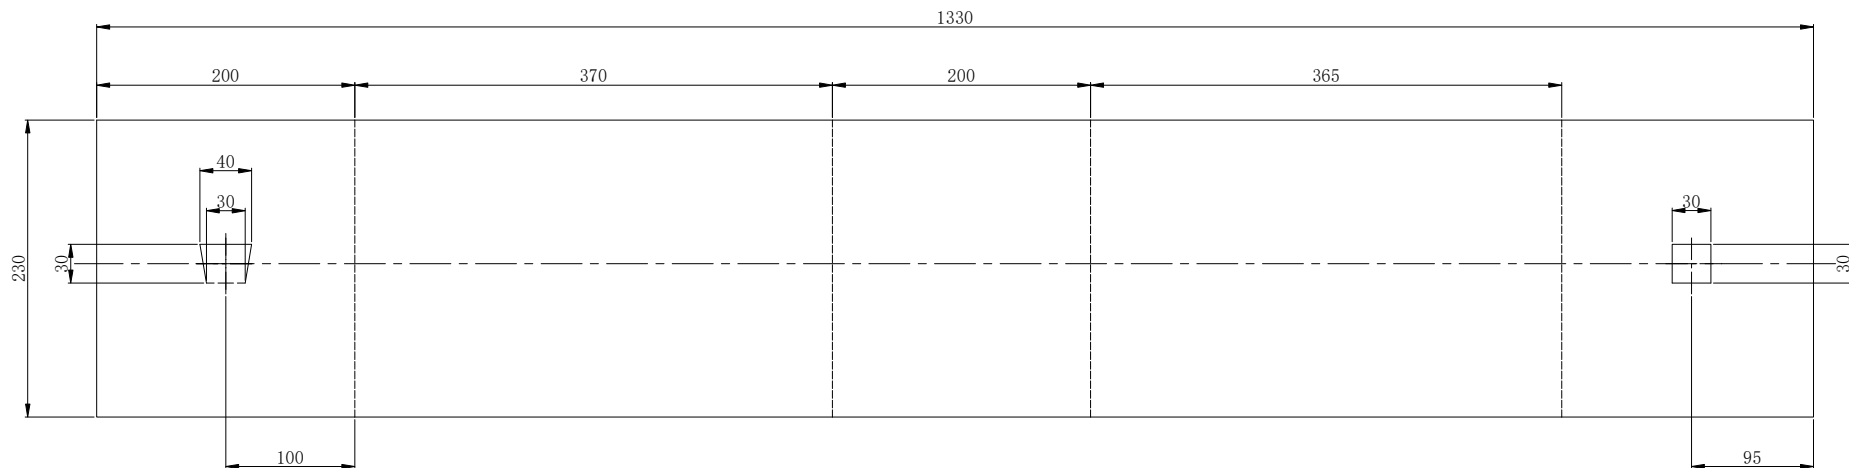

技术要求:
Technical requirements:

1. 表面清洁平整, 无折褶, 要求硬度;
The surface shall be clean and flat without folds, and the hardness is required;
2. 虚线为压线, 粗实线为切线, 没标尺寸按CAD图纸实际;
The dotted line is the pressing line, the thick solid line is the tangent line, and the CAD drawing without dimension is actual;
3. 需要印料号, 字的大小和位置不定;
Need to print the material number, and the size and position of the word are uncertain;
4. BC坑, 耐破强度: 9 ± 1 (kgf/cm²), 边压强度: $4800 \pm 10\%$ (N/m);
BC pit, breaking strength: 9 ± 1 (kgf/cm²), Edgewise crush resistance: $4800 \pm 10\%$ (N/m);
5. HSF管控等级: R级 (符合RoHS要求);
HSF control level: Level R (per RoHS requirements);

变更说明
REVISION NTOE

变更人
CHANGED BY

变更日期
REVISION DATE

设计
DESIGNED BY
陈志刚
08/24/2026
审核
CHECKED BY
邱溪
08/24/2026
标准化
STD. BY
陈志刚
08/24/2026
批准
APPROVED BY
陈志刚
08/24/2026

名称
TITLE

纸卡
PAPER CARD

料号
PART No.

7PSB132302

产品型号
MODEL No.

PL-115732

第1页
PAGE 1

共1页
TOTAL 1 PAGE

图号
DWG No.

PL115732-33A


比例
SCALE

1 : 1

材料
MATERIAL

A=B

视角
VIEW



WAC GROUP

东莞华明灯具有限公司
WAC LIGHTING (DONGGUAN) CO., LTD.
08/25/2026
发行

External Document
THAI MING LIGHTING CO., LTD.