


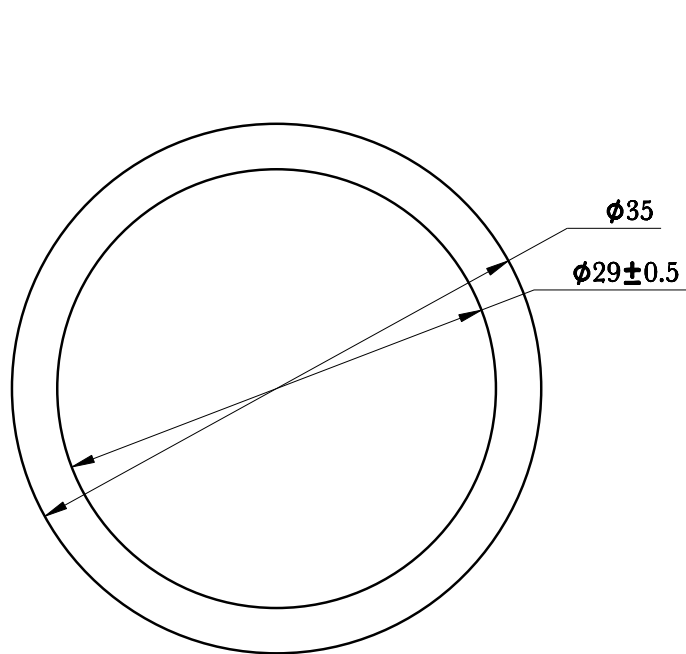

比例 2:1

技术要求:

- 1、材质: 透明硅胶, 厚度 $T=1.5$ ;
- 2、邵氏硬度 $40 \pm 5^\circ$ , 有UL认证;
- 3、耐温 $100^\circ\text{C}$ 以上;
- 4、表面平整, 无破损;
- 5、符合HSF-R级要求。

Technical requirements:

1. Material: Black silicone, thickness  $T=1.5$ ;
2. Shore hardness:  $40 \pm 5^\circ$ , UL certified;
3. Temperature resistance above  $100^\circ\text{C}$ ;
4. The surface is smooth and free of damage.
5. Comply with HSF-R grade requirements.

|                         |  |               |
|-------------------------|--|---------------|
| 铝挤截面积:<br>SECTION AREA: |  | $\text{mm}^2$ |
| 零件表面积:<br>SURFACE AREA: |  | $\text{mm}^2$ |
| 零件单重:<br>NET WEIGHT:    |  | g             |



变更说明  
REVISION NOTE

变更人  
CHANGED BY

变更日期  
REV DATE

设计  
DESIGN

审核  
CHECK

标准化  
STANDARD

批准  
APPROVE

田涵  
09/03/2026  
王乾坤  
09/04/2026  
王乾坤  
09/04/2026

名称  
TITLE

WS624725  
固定硅胶垫

料号  
PART No.

7TGD352901CL

图号  
DWG No.

WS624725-14 A

材料  
MATERIAL

硅胶

产品型号  
MODEL No.

WS624725


PAGE 1

TOTAL 1 PAGE

比例  
SCALE

1:1

视角  
PERSPECTIVE



WAC GROUP