
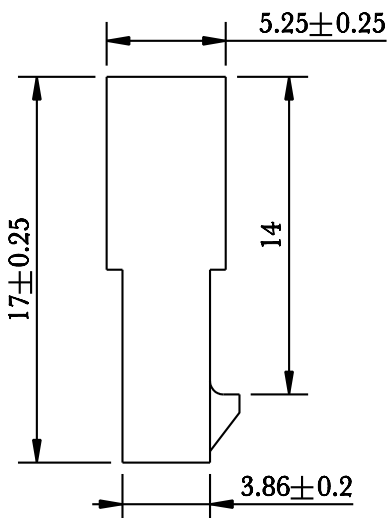
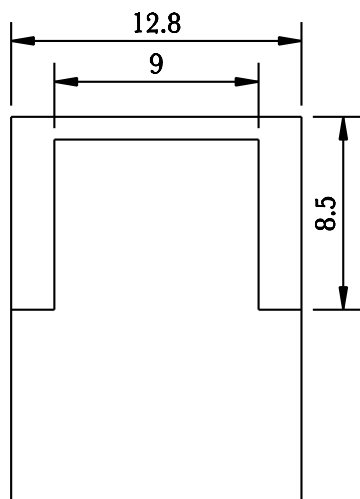


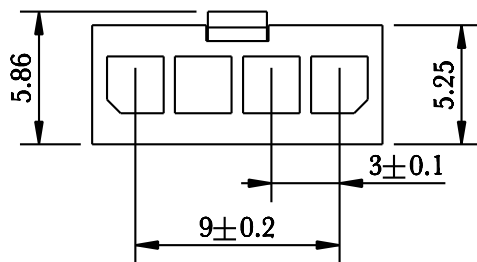

1号端口, 接线从右到左 △
依次为: 红、黑、白、灰
Port 1, wiring from right to left
They are in sequence: red, black, white, and gray

技术要求:

- 1.材料: 尼龙66, 黑色, UL94V-2, 耐温85度;
- 2.零件搭配公端导体 (7MJD122501) 使用, 配合良好;
- 3.零件与4PIN公端端子 (7TDD121401BK) 配合使用, 配合良好;
- 4.产品供应商为上亿端子, 产品型号: C3030HMA-4P;
- 5.尺寸仅供参考, 以实物为准;
- 6.HSF管控等级: R级 (符合RoHS要求)

Technical requirements

1. Material: Nylon 66, black, UL94V-2, temperature resistance 85 degrees;
2. The parts are used in conjunction with the male end conductor (7MJD122501) and fit well.
3. The parts are used in good coordination with the 4-pin male terminal (7TDD121401BK).
4. The product supplier is Shangyi Terminal, and the product model is C3030HMA-4P.
5. The dimensions are for reference only. The actual item shall prevail.
- 6.HSF Control level: R grade (Compliant with RoHS requirements)

铝挤截面积: SECTION AREA:	/	mm ²
零件表面积: SURFACE AREA:	1370	mm ²
零件单重: NET WEIGHT:	0.5	g



变更说明
REVISION NOTE

变更人
CHANGED BY

变更日期
REV DATE

设计
DESIGN

成才
10/23/2020

名称
TITLE

4PIN母端塑胶端子
4-pin female plastic terminal

料号
PART No.

7TDD121701BK

产品型号
MODEL No.

A1RA


PAGE 1

TOTAL 1 PAGE

比例
SCALE

3:1

视角
PERSPECTIVE



图号
DWG No.

A1RA-06 B

材料
MATERIAL

尼龙
Nylon

审核
CHECK

陈锦富
08/26/2026

标准化
STANDARD

刘定富
08/26/2026

批准
APPROVE

刘先志
08/26/2026

WAC GROUP

