
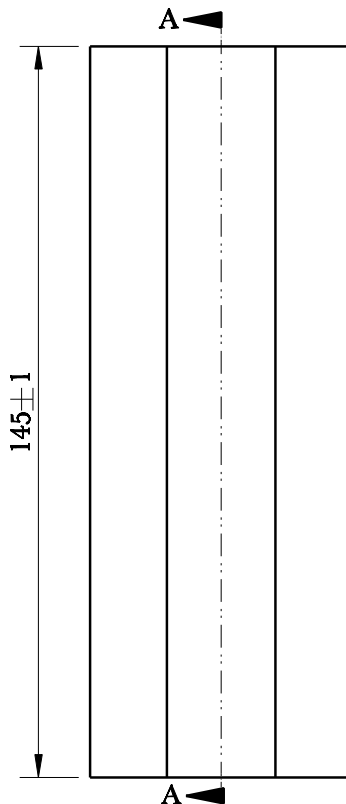


外侧面和两端面为A面
抛光长方向


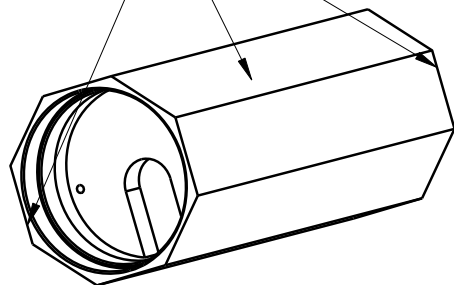


技术要求:

- 1.材质: 铝6063, 铝挤成型, 共模7MBA525203, 时效处理;
- 2.散热块能承受500N压力1min无相对位移;
- 3.端面平整, 去毛刺, 除油, 未注圆角R0.3;
- 4.符合HSF的R级要求。

Technical requirements

1. Material: Aluminum 6063, aluminum extrusion forming 7MBA525203, aging treatment;
2. The heat sink can withstand a pressure of 500N for 1 minute without relative displacement.
3. The end face is flat, deburring, degreased, and no fillet R0.3 is added.
4. Comply with the R-class requirements of HSF.

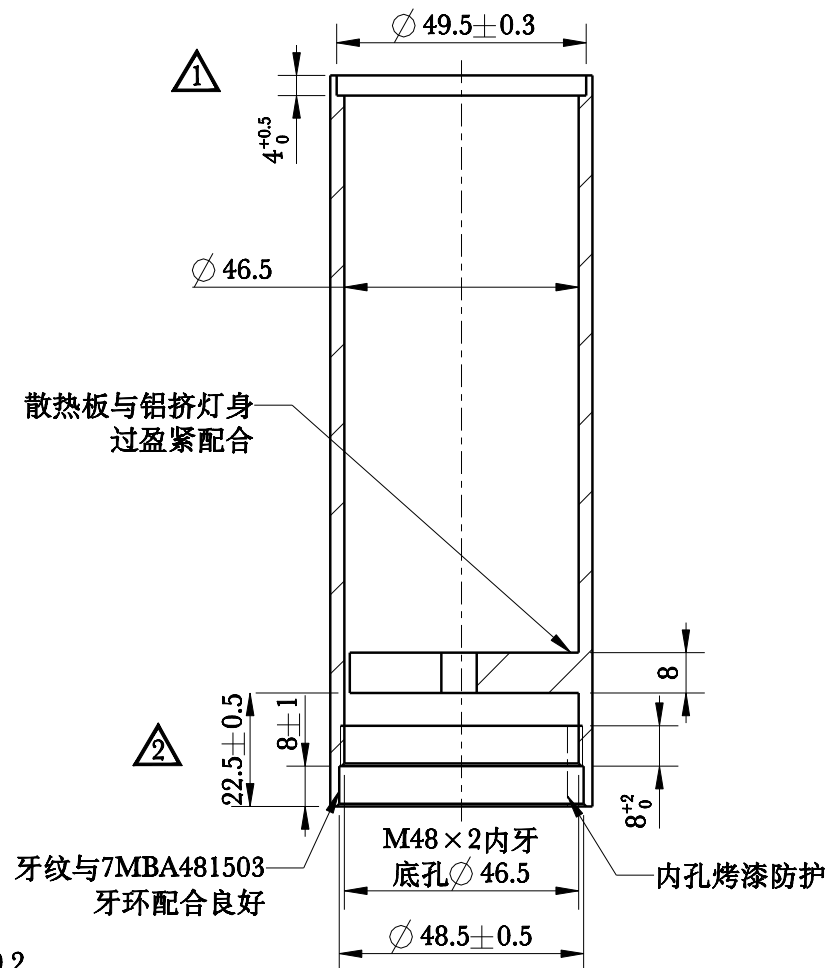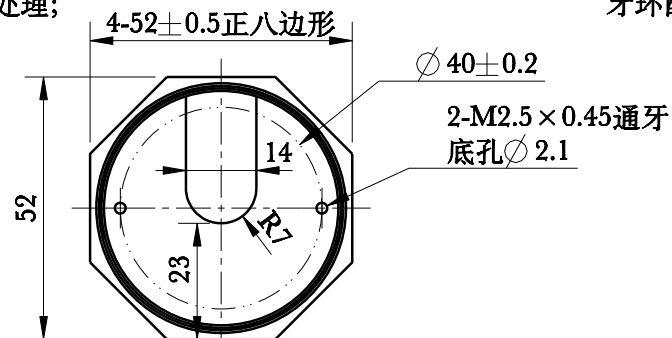

截面 A-A

铝挤截面积:	542	mm ²
SECTION AREA:	542	mm ²
零件表面积:	49400	mm ²
SURFACE AREA:	49400	mm ²
零件单重:	236	g
NET WEIGHT:	236	g

序号	变更说明	变更人	变更日期	设计	审核	批准
1	倒角改为台阶孔 The chamfer is changed to a step hole	徐小康	08/11/2026	徐小康	06/03/2026	06/03/2026
2	散热板距离29.5改为22.5 Change 29.5 to 22.5	徐小康	08/27/2026	徐小康	08/27/2026	08/27/2026
3						
4						
5						

名称	BPD14615铝挤灯身	料号	7MBA525205	产品型号	BPD14615
TITLE	BPD14615铝挤灯身	PART No.	7MBA525205	MODEL No.	BPD14615
图号	BPD14615-02 C	DWG No.	BPD14615-02 C	PAGE	1
材料	铝	MATERIAL	铝	TOTAL	1
				SCALE	2:3
				PERSPECTIVE	

WAC GROUP