


序号 REV NO.	变更说明 REVISION NTOE	变更人 CHANGED BY	变更日期 REV DATE
△			
△			
△			
△			
△			

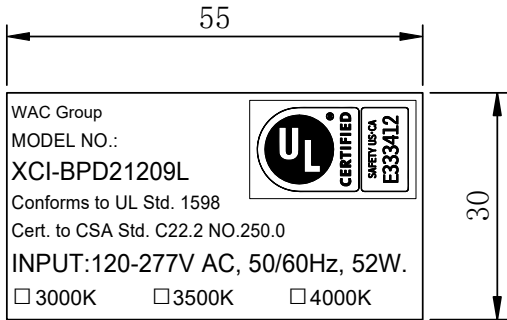

WAC Group
MODEL NO.:
XCI-BPD21209L
Conforms to UL Std. 1598
Cert. to CSA Std. C22.2 NO.250.0
INPUT:120-277V AC, 50/60Hz, 52W.
☐ 3000K ☐ 3500K ☐ 4000K

比例：2:1

技术要求:

Technical requirements:

- 1、材质：消银龙,耐温150℃,有UL认证,底纸印刷UL编号,认证标识  ,材质型号:
Material:silver polyester,temperature resistance 150℃,UL certification,
Base paper print UL file number,mark  ,material model;
- 2、背胶粘性良好,贴弧面砂纹漆表面和对折不起翘;
Good adhesive backing, paste on curved or sand grain painted surface,
or fold in half, cannot be warped;
- 3、银底黑字,文字清晰正确;
Black characters on silver background, the text is clear and correct;
- 4、WAC logo字高≥3mm,其它字体为Arial,字高≥1.6mm;
WAC logo word height ≥3mm, other fonts are Arial, text height ≥1.6mm;
- 5、用酒精擦拭15秒后,字体清晰可辨认;
After wiping with alcohol for 15S, the text is clearly recognizable;
- 6、HSF控制等级: R级(符合RoHS要求)。
HSF control level: level R, (meet RoHS requirements).

设计 DESIGN 08/31/2026	名称 TITLE XCI-BPD21209L安规标 XCI-BPD21209L UL MODEL	料号 PART NO. 7DLU*****	产品型号 MODEL NO. XCI-BPD21209L
审核 CHECK 09/01/2026	09/01/2026	图号 DWG NO. BPD21209L-08A	第 1 页 PAGE 1 共 1 页 TOTAL 1 PAGE
标准化 STANDARD 09/01/2026	WAC GROUP	材料 MATERIAL 消银龙 silver polyester	比 例 SCALE 1:1
批准 APPROVE 09/01/2026			视 角 VIEW  