


Pit grain direction

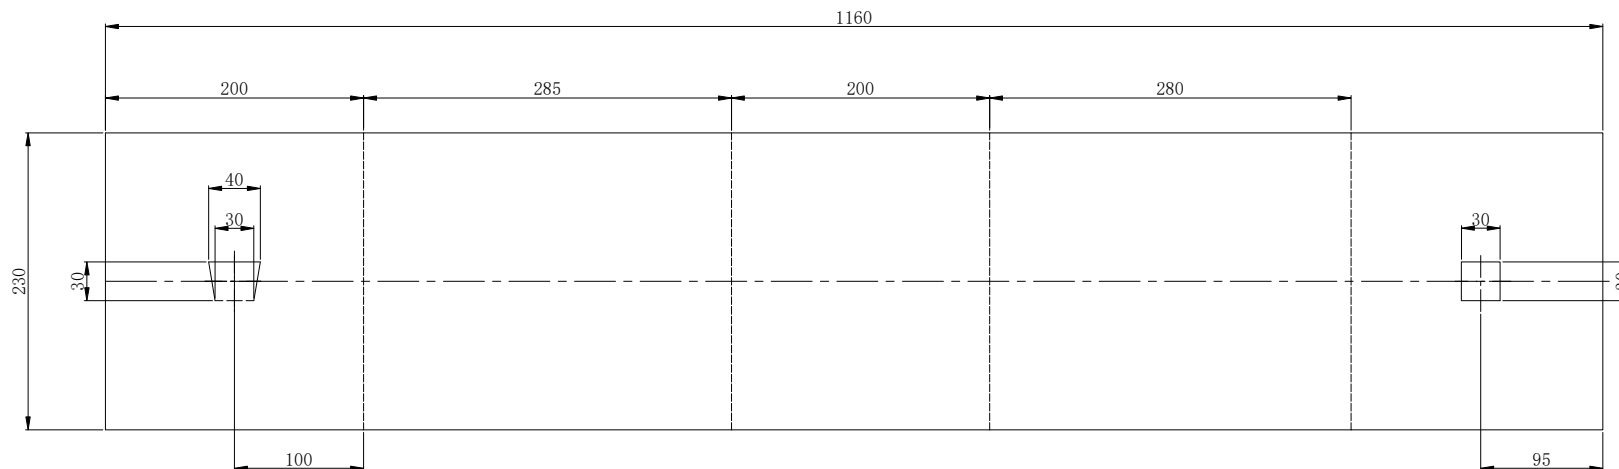

技术要求:
Technical requirements:

1. 表面清洁平整, 无折褶, 要求硬度;
The surface shall be clean and flat without folds, and the hardness is required;
2. 虚线为压线, 粗实线为切线, 没标尺寸按CAD图纸实际;
The dotted line is the pressing line, the thick solid line is the tangent line, and the CAD drawing without dimension is actual;
3. 需要印料号, 字的大小和位置不定;
Need to print the material number, and the size and position of the word are uncertain;
4. BC坑, 耐破强度: 9 ± 1 (kgf/cm²), 边压强度: $4800 \pm 10\%$ (N/m);
BC pit, breaking strength: 9 ± 1 (kgf/cm²), Edgewise crush resistance: $4800 \pm 10\%$ (N/m);
5. HSF管控等级: R级 (符合RoHS要求);
HSF control level: Level R (per RoHS requirements);

变更说明 REVISION NTOE	变更人 CHANGED BY	变更日期 REVISION DATE	设计 DESIGNED BY	陈志刚	08/24/2026	名 称 TITLE	纸卡 PAPER CARD	料 号 PART No.	7PSB112304	产品型号 MODEL No.	PL-115725	
			审核 CHECKED BY	邱溪	08/24/2026	WAC GROUP		图 号 DWG No.	PL115725-33A	第 1 页 PAGE 1	共 1 页 TOTAL 1 PAGE	
			标准化 STD BY	王文康	08/24/2026				材 料 MATERIAL	A=B	比 例 SCALE	1 : 1
			批准 APPROVED BY	陈俊东	08/24/2026						视 角 VIEW	 