



坑纹方向
Pit grain direction

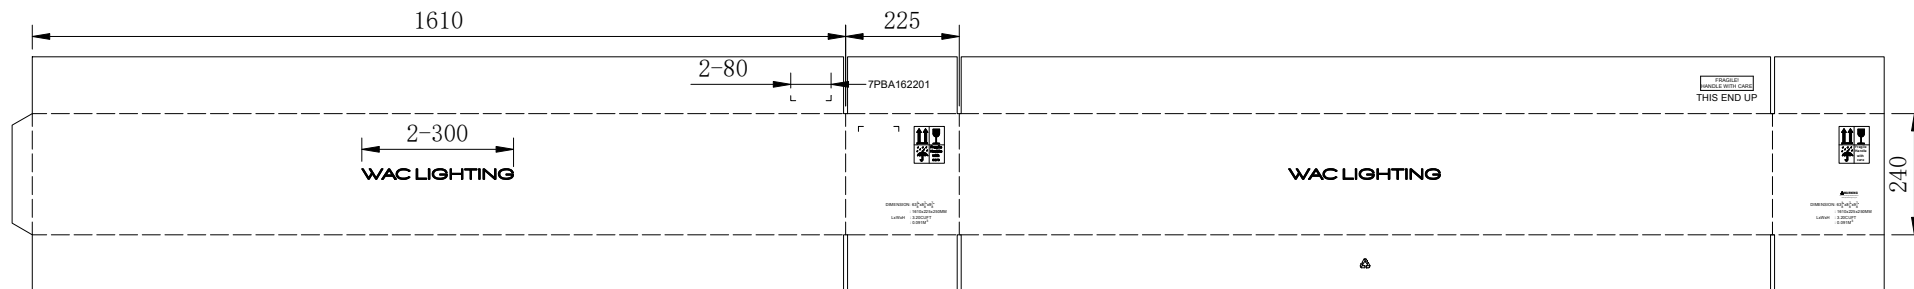

技术说明:
Technical requirements:

1. 装订方式: 钉箱;
Binding method: Nail box
2. 整个版面印刷颜色为黑色;
The printing color of the entire layout is black
3. WAC Logo印刷在外箱的两正唛中间位置, 回收标居中印刷;
WAC logo is printed in the middle of the two positive marks of the outer box, and the recycling mark is printed in the middle;
4. 材质要求: BC坑, 耐破强度: 9 ± 1 (kgf/cm²), 边压强度: $4800 \pm 10\%$ (N/m);
Material requirements: BC pit, breaking strength: 9 ± 1 (kgf/cm²), Edgewise crush resistance: $4800 \pm 10\%$ (N/m).
5. 直角标距边25mm, 物料号垂直居中印刷;
Right-angle gauge length side 25mm, Part No. vertical center printing.
6. HSF控制等级: R级 (符合RoHS要求)。
HSF control level: level R (in accordance with ROHS requirements).

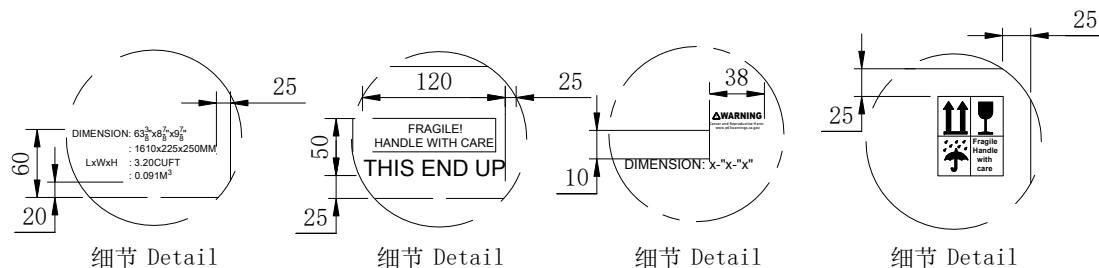

此处字高6mm, 字体Arial
The word height here is 6mm, the font is Arial.

警示语
Warning

此处字高2mm
The word height here is 2mm

标志尺寸为60*73mm
Size : 60*73mm

变更说明
REVISION NTOE

变更人
CHANGED BY

变更日期
REVISION DATE

设计
DESIGN

冯文康
09/03/2026

名称
TITLE

WAC外箱
WAC CARTON BOX

料号
PART No.

7PBA162201

产品型号
MODEL No.

WS-W89524

WAC GROUP

图号
DWG No.

WSW89524-34A

材料
MATERIAL

A=B

第1页
PAGE 1

共1页
TOTAL 1 PAGE

比例
SCALE

视角
VIEW

